



9针D型母头俯视图

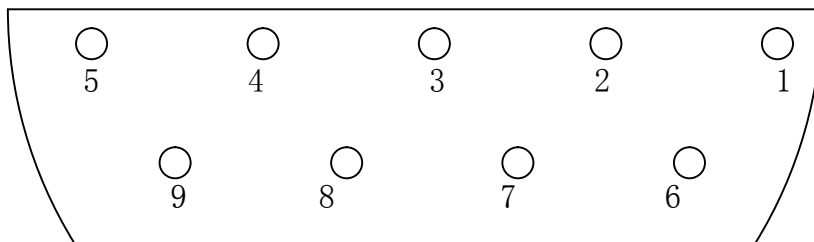

9针D型头端子接线图 (COM3是RS485)				
	COM1		COM3	
	Rs422	Rs485	Rs232	Rs485
1	TXD+	TX+/TX-		
2			RXD	
3			TXD	
4	RXD+			
5	GND	GND	GND	GND
6	TXD-	RX+/RX-		
7				RXD+/RXD-
8				TXD+/TXD-
9	RXD-			

9针D型头端子接线图 (COM3是RS232)				
	COM1		COM3	
	Rs422	Rs485	Rs232	Rs232
1	TXD+	TX+/TX-		
2			RXD	
3			TXD	
4	RXD+			
5	GND	GND	GND	GND
6	TXD-	RX+/RX-		
7				RXD
8				TXD
9	RXD-			

5针端子俯视图

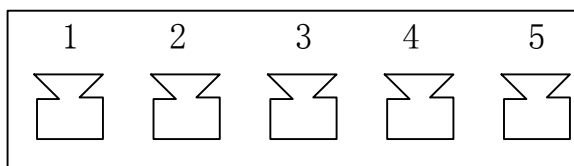

COM2 A系列触摸屏端子图		
	COM2	
	Rs485	Rs422
1	TXD+/TXD-	TX+
2		RX+
3		RX-
4	RXD-/RXD-	TX-
5	GND	GND

COM2 B系列触摸屏端子图		
	COM2	
	Rs485	Rs232
1	TXD+/TXD-	
2	TXD-/RXD-	
3		TX
4		RX
5	GND	GND